


CBL-500B 自润滑翻边轴承标准公制尺寸
CBL-500B CBLIf-lubricating Flange Bearings Standard Metric Size

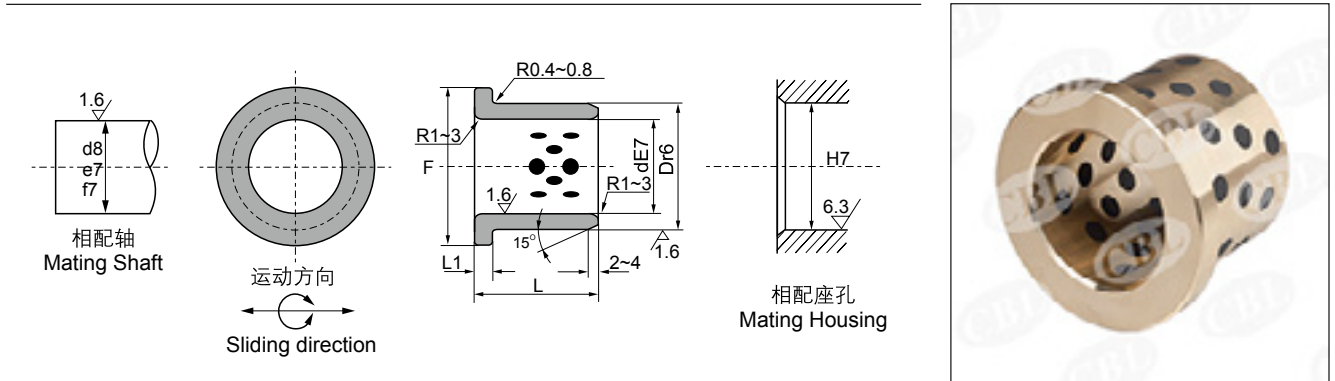

单位Unit: mm

d	D	d E7	D r6	F	L ₁	L ^{-0.10} _{-0.30}										
						15	20	25	30	35	40	50	60	80	100	
10	14	10	^{+0.040} / _{+0.025} 14	^{+0.034} / _{+0.023} 14	22	2	1015	1020								
12	18	12			25		1215	1220								
13	19	13			26		1315	1320								
14	20	14	^{+0.050} / _{+0.032} 14		27	3	1415	1420	1425							
15	21	15		^{+0.041} / _{+0.028} 15	28		1515	1520	1525	1530						
16	22	16			29		1615	1620	1625	1630						
20	30	20			40			2020	2025	2030	2035					
25	35	25	^{+0.061} / _{+0.040} 25		45			2520	2525	2530	2535	2540				
30	40	30		^{+0.050} / _{+0.034} 30	50			3020	3025	3030	3035	3040	3050			
35	45	35			60				3525	3530	3535	3540	3550			
40	50	40	^{+0.075} / _{+0.050} 40		65	5				4030	4035	4040	4050			
45	55	45			70					4530	4535	4540	4550	4560		
50	60	50		^{+0.060} / _{+0.041} 50	75					5035	5040	5050	5060			
55	65	55			80						5540	5550	5560			
60	75	60		^{+0.062} / _{+0.043} 60	90						6040	6050	6060	6080		
70	85	70	^{+0.090} / _{+0.060} 70		105	7.5						7050	7060	7080		
75	90	75		^{+0.073} / _{+0.051} 75	110							7550	7560	7580	75100	
80	100	80			120									8060	8080	80100
90	110	90			130									9060	9080	90100
100	120	100	^{+0.107} / _{+0.072} 100	^{+0.076} / _{+0.054} 100	150	10								10060	10080	100100
120	140	120		^{+0.088} / _{+0.063} 120	170									12060	12080	120100